

## HASTINGS PIER REGENERATION

#### 

The Stirling Prize for 2017 was awarded to dRMM for the restoration of the grade II listed pier which was severely damaged by arson in 2010. The 280m long pier was repaired and new deck laid.

A new visitors centre was constructed using Cross Laminated Timber, clad in the limited timber decking that survived the fire. The new visitors centre is 100% CLT structure with a warm exposed CLT timber interior. The centre includes a community space and educational centre, along with a rooftop viewing terrace and café.

#### CARBON CALCULATION


Total stored/sequestered carbon in the KLH panels for Hastings Pier is 43.02 tonnes


### PROJECT DETAILS

Project Value: £240,000 Project Dates: 2014 KKLH UK Services: Supply and Erect Timber Volume: 136 m3 Build Period: 6 weeks

#### AWARDS

2017 WINNER Stirling Prize | RIBA Awards 2017 "PIER OF THE YEAR" | National Pier Society 2017 WINNER RIBA National Award 2017 WINNER RIBA South East Award 2017 WINNER "Project Architect of the Year" | RIBA South East Award 2017 WINNER "Client of the Year" | RIBA South East Award

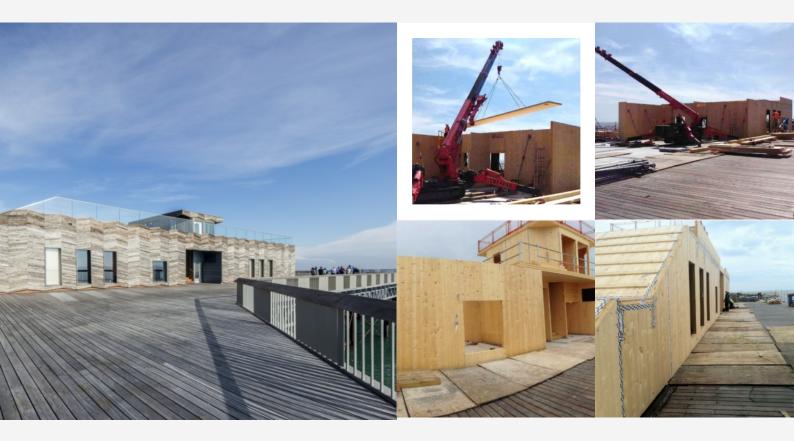

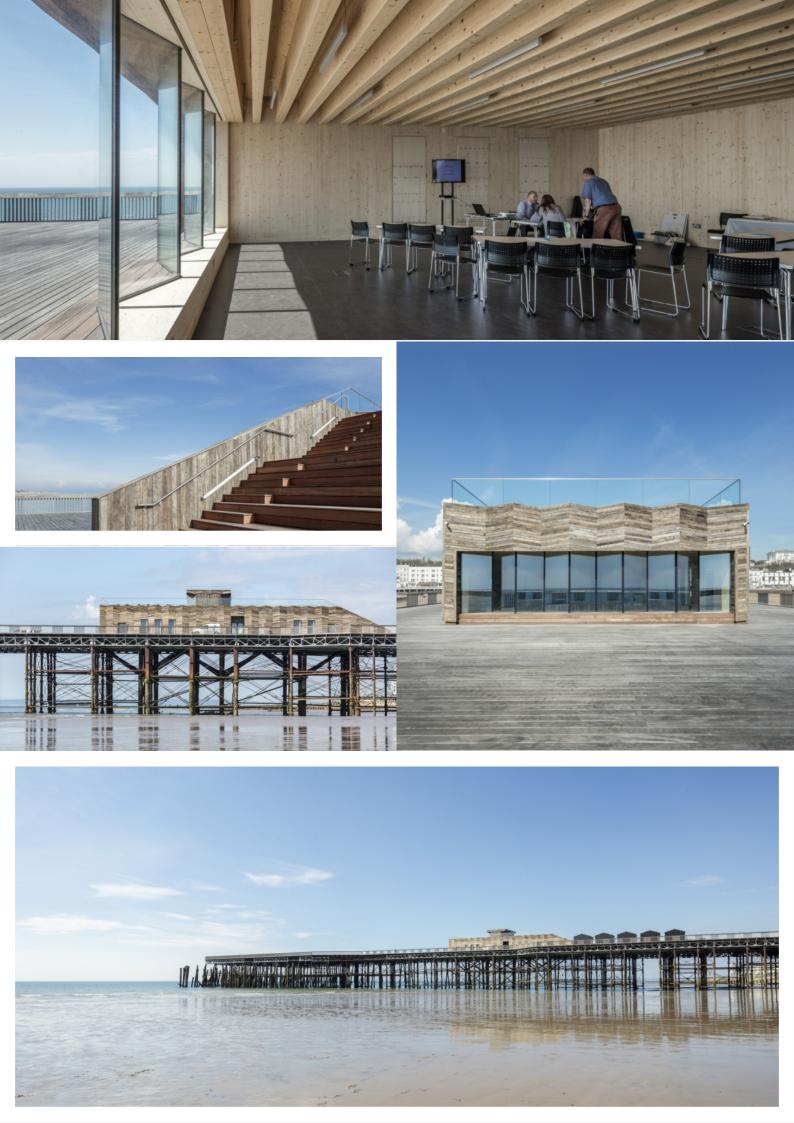





.....

BUILDER

Hastings Pier Charity

# PHOTOGRAPHY CREDITS

Ramboll UK Ltd. (completed project) KLH UK (construction images)

## ARCHITECTURE

dRMM <u>www.drmm.co.uk</u> ENGINEERING

Ramboll UK Ltd. www.ramboll.com