


STANDARDPLATTENTYPEN

FÜR DIE WAND
Decklagen in Plattenquerrichtung (DQ)

Plattentyp	Plattenaufbau / Lamellenstärken (in mm)							
KLH 60 mm 3s DQ	20	20	20					
KLH 70 mm 3s DQ	20	30	20					
KLH 80 mm 3s DQ	30	20	30					
KLH 90 mm 3s DQ	30	30	30					
KLH 100 mm 3s DQ	30	40	30					
KLH 110 mm 3s DQ	40	30	40					
KLH 120 mm 3s DQ	40	40	40					
KLH 100 mm 5s DQ	20	20	20	20	20			
KLH 110 mm 5s DQ	20	20	30	20	20			
KLH 120 mm 5s DQ	30	20	20	20	30			
KLH 130 mm 5s DQ	30	20	30	20	30			
KLH 140 mm 5s DQ	30	30	20	30	30			
KLH 150 mm 5s DQ	30	35	20	35	30			
KLH 160 mm 5s DQ	30	35	30	35	30			
KLH 180 mm 7s DQ	30	20	30	20	30	20	30	

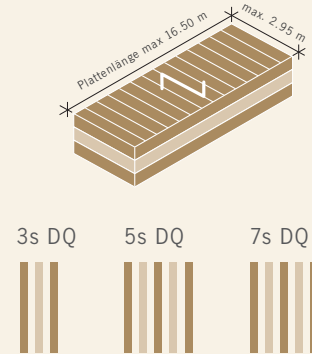

FÜR DECKE UND DACH
Decklage in Plattenlängsrichtung (DL)

KLH 60 mm 3s DL	20	20	20					
KLH 70 mm 3s DL	20	30	20					
KLH 80 mm 3s DL	30	20	30					
KLH 90 mm 3s DL	35	20	35					
KLH 100 mm 3s DL	35	30	35					
KLH 110 mm 3s DL	35	40	35					
KLH 120 mm 3s DL	40	40	40					
KLH 100 mm 5s DL	20	20	20	20	20			
KLH 110 mm 5s DL	20	25	20	25	20			
KLH 120 mm 5s DL	20	30	20	30	20			
KLH 130 mm 5s DL	35	20	20	20	35			
KLH 140 mm 5s DL	40	20	20	20	40			
KLH 150 mm 5s DL	40	20	30	20	40			
KLH 160 mm 5s DL	40	20	40	20	40			
KLH 170 mm 5s DL	40	25	40	25	40			
KLH 180 mm 5s DL	40	30	40	30	40			
KLH 190 mm 5s DL	40	35	40	35	40			
KLH 200 mm 5s DL	40	40	40	40	40			
KLH 160 mm 5ss DL	30+30	40	30+30					
KLH 200 mm 7s DL	20	40	20	40	20	40	20	
KLH 220 mm 7s DL	30	35	30	30	30	35	30	
KLH 240 mm 7s DL	30	40	30	40	30	40	30	
KLH 200 mm 7ss DL	30+30	25	30	25	30+30			
KLH 210 mm 7ss DL	30+30	30	30	30	30+30			
KLH 220 mm 7ss DL	40+40	20	20	20	40+40			
KLH 230 mm 7ss DL	35+40	20	40	20	40+35			
KLH 240 mm 7ss DL	40+40	20	40	20	40+40			
KLH 250 mm 7ss DL	35+40	30	40	30	40+35			
KLH 260 mm 7ss DL	40+40	30	40	30	40+40			
KLH 280 mm 7ss DL	40+40	40	40	40	40+40			
KLH 300 mm 8ss DL	40+40	30	40+40	30	40+40			
KLH 320 mm 8ss DL	40+40	40	40+40	40	40+40			

